

# Product Specifications

---




## ***Multi purpose Distribution Cable(GJFJV/H)***

### ***Standard***

---

Reference with standard YDff 1258.4-2005, ICEA-596, GR-409, IEC60794-2-20/21 、 etc;and meet the requirements of UL approval for OFNR.

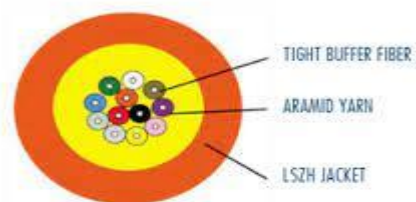

### ***Description***

---

GJFJV multi-purpose distribution cable use several $\Phi 900\mu\text{m}$  flame-retardant tight buffer fibre as optical communication medium, the tight buffer fibre wrapped with a layer of aramid yarn as strength member units, and the cable is completed with a PVC or LSZH(low smoke Zero halogen, Flame-retardant)jacket.

### ***Characteristics***

---

- Tight buffer fibre ease of stripping
- Aramid yarn as strength member make cable have excellent tensible strength
- The jacket anti-corrosion,anti-water,anti-ultraviolet radiation, flame-retardant and harmless to environment etc

# Product Specifications



## Technical parameters

Cable Type(Increlased by 2 fibers)	Cable Diameter mm	Cable Weight Kg/km	Tensile Strength Long/short term N	Crush Resistance Long/short term N/100mm	Bending Radiu Dyna mic/Static mm	Jacket Material
GJPFJV(H)-04	4.8	20	400/1320	300/1000	20D/10D	PVC/LSZH
GJPFJV(H)-06	5.0	22	400/1320	300/1000	20D/10D	PVC/LSZH
GJPFJV(H)-08	5.5	26	400/1320	300/1000	20D/10D	PVC/LSZH
GJPFJV(H)-12	6.5	32	400/1320	300/1000	20D/10D	PVC/LSZH
GJPFJV(H)-24	8.5	54	400/1320	300/1000	20D/10D	PVC/LSZH
GJPFJV(H)-48	10.5	85	400/1320	300/1000	20D/10D	PVC/LSZH

## Applications

- Indoor any purpose cable distribution
- Multi optical fiber jumper