


Product Specifications

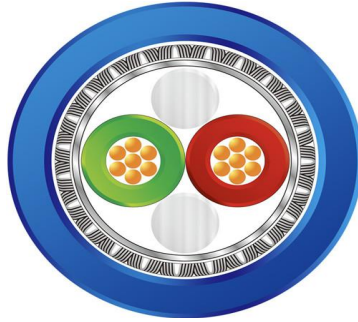

Profibus-PA 总线电缆 7 股固定布线 100ohm

Specifications


Conductor: solid or stranded conductor

Insulation: FPE

Color: red, green

Shielding: Aluminum foil wrapped with tinned
copper braid

Color: blue

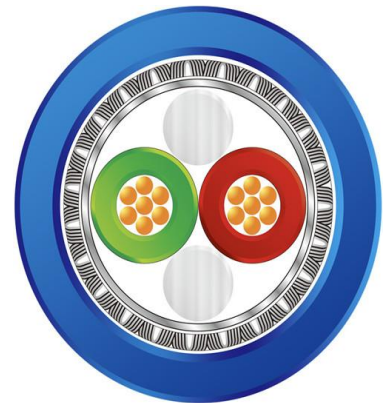

Description

Profibus-PA bus cable 7 strands fixed wiring PVC sheath 100ohm

FIELD BUS CABLE PROFIBUS-PA 2X18AWG 100ohm

Applications

PROFIBUS-PA cables for industrial field bus systems in automation and communication technology.

Suitable for stationary applications.



Product Specifications

Electrical data

Test voltage :2000V/min (AC) **Rated voltage**:300V

Characteristic impedance: $100\pm 20\Omega$ @31.25MHz

bending radius(Fixed application): 10D (D=cable diameter)

Temperature range

Fixed application:PVC -20°C~70°C LSZH:-40°C~80°C

Model	Specification	Sheath	Outer diameter mm	copper weight KG/KM	cable weight KG/KM
Profibus-PA	1×2×18AWG/7	PVC	8.0	34	78.6
Profibus-PA	1×2×18AWG/7	LSZH	8.0	34	79.4