


Product Specifications

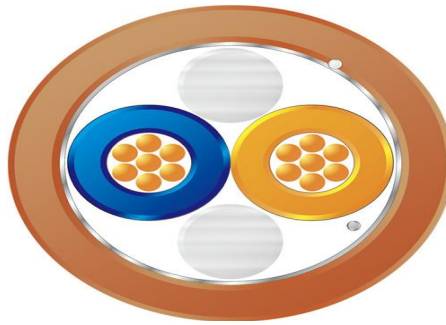

Profibus-PA 总线电缆单 7 股固定布线 100ohm

Specifications


Conductor: Solid or Stranded

Insulation: Foamed PE

Color: blue, orange

Shielding: Aluminum foil wrapped

Color: orange (approximate RAL2003)

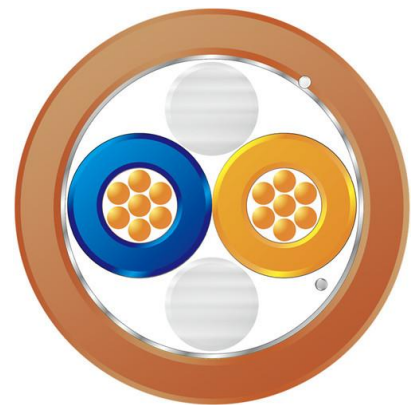

Description

FIELDBUS CABLE PROFIBUS-PA 2X18AWG 100ohm

Applications

PROFIBUS-PA cables for industrial field bus systems in automation and communication technology.

Suitable for stationary applications.

Product Specifications



Electrical data

Test voltage :2000V/min (AC) **Rated voltage**:300V

Characteristic impedance: $100\pm 20\Omega$ @31.25MHz

bending radius(Fixed application): 10D (D=cable diameter)

Temperature range

Fixed application:PVC -20°C~70°C LSZH:-40°C~80°C

Model	Specification	Sheath	Outer diameter mm	copper weight KG/KM	cable weight KG/KM
Profibus-PA	1×2×18AWG/7	PVC	7.0	22	61
Profibus-PA	1×2×18AWG/7	LSZH	7.0	22	62